

Power Meter

IQ-1100/PM-1100



110 dB dynamic range

Graphical display mode

Excellent ± 0.015 dB linearity

Flexible data acquisition



Fiber-optic T&M,
monitoring, manufacturing
and assembly solutions

EXFO

Accurate, Automated Measurements

The PM-1100 and IQ-1100 Power Meters provide accurate power measurements over a high dynamic range along with high resolution and excellent linearity. Use the IQ-1100 and PM-1100 Power Meters for automatically measuring discrete values such as insertion loss or, alternately, for continuous monitoring and data acquisition. The IQ-1100 module series and the stand-alone PM-1100 provide exceptional performance, flexibility, user-friendliness and extensive integration capabilities.

The IQ-1100 single-channel power meter module series is part of the IQ solution. The IQ-203 mainframe and IQ-206 expansion units support up to 27 modules. For a virtually unlimited number of channels, link two or more systems together through the GPIB interface.



Key Features

Excellent Specifications. The IQ-1100 and PM-1100 Power Meters offer ± 0.015 dB linearity with a $\pm 5\%$ absolute uncertainty and a 0.001 dB power resolution. Whether you are measuring absolute or relative power levels, count on accurate and precise measurements.

Multiple Detector types. Both high-power Ge and InGaAs photodetectors are available. For general power measurements, an InGaAs detector offers a 110 dB (+9 dBm to -100 dBm) power range in the 800 to 1700 nm wavelength range. InGaAs is also the detector of choice when temperature stability is an important consideration. Select a high-power Ge detector when measuring relatively high power (up to 20 dBm) in the 750 to 1700 nm wavelength range. The sensitivity of this detector is -75 dBm.

Easy-to-Use Software. The IQ-1100 Windows-compatible software application provides unprecedented user-friendliness, improved productivity and instrument flexibility. Easily select all configuration parameters from a single setup window.

IQ-1100: Advanced Data Acquisition

Simple, Flexible and Familiar Graphical User Interface

- Windows interface
- Easy control with software buttons, front panel keys or keyboard
- Multiple-user configuration storage
- Simultaneous multiple applications for true multitasking
- Online help

Channel Setup

Select wavelength, resolution, offset, sampling rate and units from a single window.

Reference Button


Take power reference measurements at the touch of a button.

Display Units

Select dB, dBm or W.

Averaging

Display measurements as unprocessed or averaged values.

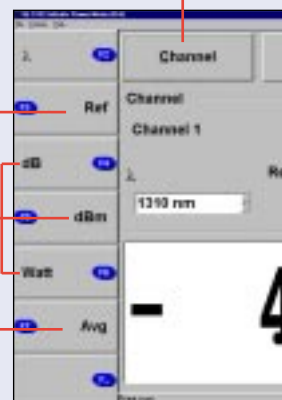

PM-1100: Performance and Ease of Use



- 1 **Adjustable display intensity**
Turn off the display without turning off the unit
- 2 **Direct access to setup parameters**
Perform nulling or adjust setup using front panel keys
- 3 **Program mode**
Programmable acquisitions of up to 1024 samples
- 4 **Menu-driven interface**
Easy control of advanced functions menus
- 5 **Detector options**
Choose between InGaAs or high-power Ge detectors

Applications

The IQ-1100 and PM-1100 are the ideal power meters for the following applications:

- Periodic multichannel monitoring
(requires an IQ-1100 or PM-1100 Power Meter and IQ-9100 Optical Switch)
- Absolute power measurement
- Insertion loss measurement
- System or component monitoring
- Linearity verification
- Component characterization
- Source stability measurement
- Attenuation measurement

Three convenient display modes:

- Absolute (in dBm or W)
- Relative (in dB)
- Offset (in dBm or dB)

Variable Sampling Rate
Select a high sampling rate to measure transient responses or a low sampling rate for very low power levels.

Variable Resolution
Use the automatic resolution or select from 0, 1, 2 or 3 decimals.

Convenient Offset Feature
Enter an offset value to compensate for known power loss or gain.

Unique Graphical Display Mode (IQ-1100)

Timed and/or Conditional Data Acquisition

Specifications¹

Model	PM/IQ-1102X	PM/IQ-1103
Detector type	GeX	InGaAs
Detector size (mm)	2	1
Wavelength range (nm)	750 to 1700	800 to 1700
Power range ² (dBm)	20 to -75	9 to -100
Uncertainty ³ (dB)	± 5 % (1000 to 1650 nm) (+10 to -35 dBm)	± 5 % (1000 to 1640 nm) (0 to -60 dBm)
Linearity ⁴ (dB)	± 0.015 (10 to -35 dBm)	± 0.015 (0 to -60 dBm)
Power resolution ⁴ (dB)	0.001 (20 to -35 dBm)	0.001 (9 to -60 dBm)
Wavelength resolution (nm)	1	1
Fiber type (µm)	5/125 to 62.5/125	5/125 to 62.5/125

Standard Accessories

Instruction manual, fiber-optic connector adapter (FOA), Certificate of Calibration and Certificate of Compliance

Software Options

OCX controls and LabVIEW drivers (IQ-1100)

General Specifications

IQ-1100

Dimensions (H x W x D)	12.1 cm x 3.8 cm x 26.2 cm (4 3/4 in x 1 1/2 in x 10 5/16 in)
Weight	0.63 kg (1.4 lb)
Temperature (operating)	0 °C to 50 °C (32 °F to 122 °F)
(storage)	-40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity ⁵	0 % to 80 % non-condensing

PM-1100

Dimensions (H x W x D)	11.7 cm x 22.2 cm x 33.3 cm (4 5/8 in x 8 3/4 in x 13 1/8 in)
Weight	2.0 kg (4.5 lb)
Temperature (operating)	0 °C to 40 °C (32 °F to 104 °F)
(storage)	-40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity ⁵	0 % to 80 % non-condensing

Notes

- All power specifications are at 1310 nm unless otherwise specified, and after a warmup period of 20 minutes followed by an offset nulling.
- From 0 °C to 30 °C.
- At 23 °C ± 1 °C with FOA-222. For GeX detectors, add 1 % to uncertainty below 1000 nm, and 3 % over 1650 nm. For InGaAs detectors, add 1 % to uncertainty below 1000 nm and 6 % over 1640 nm. All uncertainties were valid on the day of calibration.
- For a temperature that is stable within ± 1 °C in the 0 °C to 40 °C range.
- Measured in the 0 °C to 40 °C range.

Ordering Information

IQ-110X

PM-110X

Detector code

- 02X = GeX
- 03 = InGaAs

Specify model number and the connector adapter you wish to obtain (one free connector adapter included)

FOA-216: SMA 906 low reflection
 FOA-222 : FC low reflection: FC (/PC/SPC/UPC/APC, NEC-D3)
 FOA-228 : DIN 47256 (LSA) low reflection: DIN 47256 (/PC/APC)
 FOA-232 : ST low reflection: ST (/PC/SPC/UPC)
 FOA-240 : Diamond HMS-0, HFS-3 (3.5 mm) low reflection
 FOA-254: SC low reflection: SC (/PC/SPC/UPC/APC)
 FOA-276: FSMA HMS-10/AG, HFS-10/AG low reflection

FOA-284: Diamond HMS-10, HFS-13 low reflection
 FOA-296: E-2000 low reflection: E-2000 (/PC/APC)
 FOA-298: LC low reflection
 FOA-299: MU low reflection
 FOA-8100: Utility adapter

Please select your free fiber-optic connector adapter (FOA) from the preceding list.

CORPORATE HEADQUARTERS	465 Godin Avenue	Vanier (Quebec) G1M 3G7 CANADA	Tel.: 1 418 683-0211 · Fax: 1 418 683-2170
EXFO AMERICA	1201 Richardson Drive, Suite 260	Richardson TX 75080 USA	Tel.: 1 800 663-3936 · Fax: 1 972 907-2297
EXFO EUROPE	Le Dynasteur, 10/12 rue Andras Beck	92366 Meudon la Forêt Cedex FRANCE	Tel.: +33.1.40.83.85.85 · Fax: +33.1.40.83.04.42
EXFO ASIA-PACIFIC	151 Chin Swee Road, #03-29 Manhattan House	SINGAPORE 169876	Tel.: +65 6333 8241 · Fax: +65 6333 8242
EXFO CHINA	Beijing New Century Hotel Office Tower, Room 1754-1755 No. 6 Southern Capital Gym Road	Beijing 100044 P. R. China	Tel.: +86 (10) 6849 2738 · Fax: +86 (10) 6849 2662

TOLL-FREE (USA and Canada) Tel.: 1 800 663-3936

www.exfo.com • info@exfo.com

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to the EXFO Web site at <http://www.exfo.com/support/techdocs.asp>
 In case of discrepancy, the Web version takes precedence over any printed literature.

