

FLS-2200

BROADBAND SOURCE



Compact, rugged and highly reliable—an essential lab testing building block

KEY FEATURES

Covers all bands

Single SLED: 980, 1300, 1485, 1550 and 1610 nm

Dual SLED: 1300 nm/1550 nm and CWDM range (1460 to 1620 nm)

Variable output power

Optimized for power stability

SPEC SHEET

BROAD SPECTRAL RANGE, IMPRESSIVE POWER

The high-power, SLED-based FLS-2200 Broadband Source family covers all the bands needed for telecommunications applications. It provides a broader spectral range and more spectral density in a singlemode fiber than a white light source. The highly stable FLS-2200 is ideal for broadband applications, coarse wavelength-division multiplexing (CWDM) network testing, and passive optical networks (PON) component manufacturing and testing, as well as fiber-optic sensing and spectroscopy.

Two Sources, One Box

For CWDM testing, the dual-SLED option, covering the S, C and L bands, enables accurate characterization of fiber links and their passive components, with a very cost-effective test setup. Use the 1300 nm/1550 nm source for dual-window couplers and for PON components.



Designed for Component Testing

EXFO's FLS-2200 offers enough power along the spectrum to measure high-level insertion loss. By combining the FLS-2200 with an optical spectrum analyzer (OSA), you can efficiently qualify your components during development or perform pass/fail testing during production.


Depolarization

As sources are naturally polarized, it is possible to take advantage of EXFO's M9700 and IQS-9700 Passive Depolarizers, to bring the degree of polarization to less than 5%. This is especially useful when measuring the average insertion loss or counteracting the polarization dependency of an OSA.

High Spectral Density Stability


High spectral density stability is essential to ensure that the test setup produces accurate measurements, time and again. The more stable the spectrum, the less often a reference trace has to be acquired. This translates into better productivity.

After a reference trace is acquired with the OSA, it can be subtracted to all subsequent traces. With no device under test (DUT) in the system, the resulting traces, centered around the averaged value, present the typical spectral fluctuations of the source.

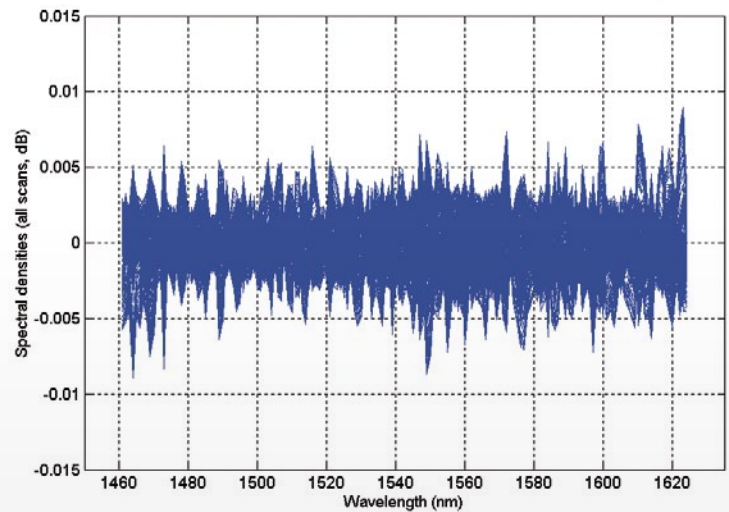


Impressive spectral density stability of the FLS-2200 Broadband Source (compilation of 30 scans, one per minute).


TAKE A LOOK AT THE SPECTRA* OF OUR FLS-2200 MODELS!

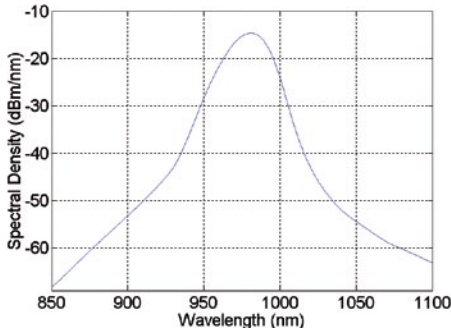


FLS-2200-06-P1

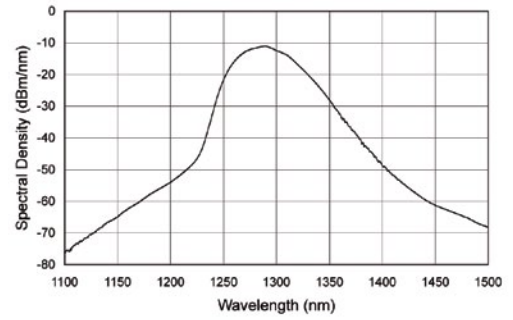


FLS-2200-02-P1-IS

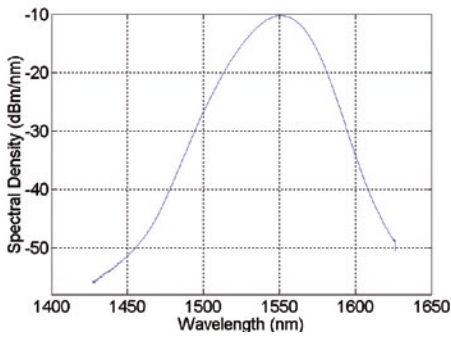


FLS-2200-03-P1-IS

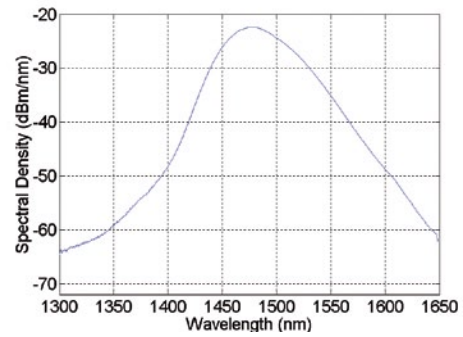


FLS-2200-05-P1-IS

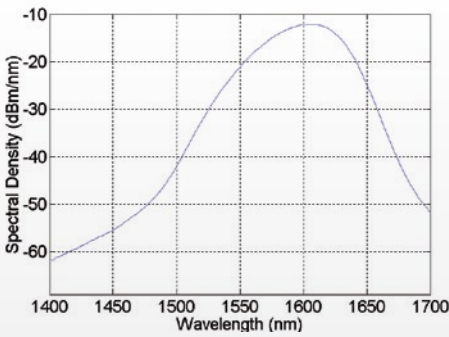

FLS-2200-04-P1-IS

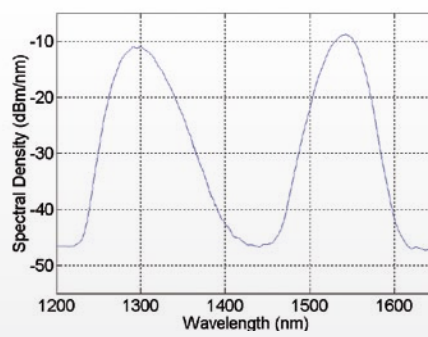

FLS-2200-23-P1-IS

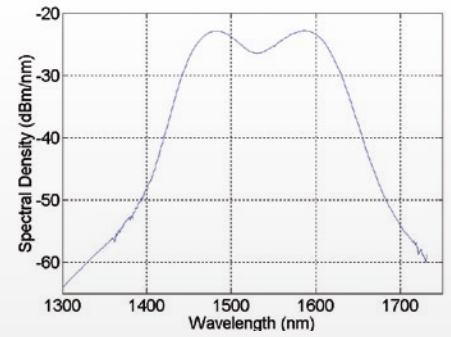

FLS-2200-SCL-P1-IS

* These are typical spectra.

SPECIFICATIONS ^a					
Single SLED					
Parameter	FLS-2200-06 ^c	FLS-2200-02	FLS-2200-05	FLS-2200-03	FLS-2200-04
Center wavelength (nm)	980 ± 10	1300 ± 20	1485 ± 15	1550 ± 20	1610 ± 15
3 dB spectral width (nm)	≥ 20 (25 typ.)	≥ 40 (45 typ.)	≥ 50 (60 typ.)	≥ 50 (56 typ.)	≥ 50 (55 typ.)
Output power (dBm)	0	4	-3.5	5	5
Minimum spectral density (dBm/nm) ^b	-18 (970-990 nm)	-25 (1260-1360 nm)	-27 (1450-1510 nm)	-27 (1510-1590 nm)	-20 (1565-1640 nm)
Peak spectral density (dBm/nm) ^b	-13	-12	-21	-9	-10
Total power stability (dB) ^d					
15 min	± 0.01	± 0.01	± 0.01	± 0.01	± 0.01
8 hours	± 0.01	± 0.01	± 0.01	± 0.01	± 0.01
Spectral density stability (dB) ^{b, d, e}					
15 min	± 0.01	± 0.01	± 0.01	± 0.01	± 0.01
8 hours	± 0.015	± 0.015	± 0.015	± 0.015	± 0.015
Ripple (dB) ^{e, g}	0.3	0.3	0.3	0.3	0.3
Fiber type (μm)	5/125	9/125	9/125	9/125	9/125
Dual SLED					
Parameter	FLS-2200-23	FLS-2200-SCL	Notes a. Specifications are valid at 23 °C ± 2 °C, at maximum power after warmup time (30 minutes), with isolator, for return loss of ≥ 30 dB. b. Typical value. c. Specifications for the 980 nm source are set without an isolator. d. Stability is expressed as ± half the difference between the maximum and minimum values measured in the period. e. Measured in a 0.1 nm resolution bandwidth. f. Output power of dual SLED source is the sum of the power output of each individual SLED. g. The ripple is specified over a spectral range limited to 3 dB below the peak power density.		
Center wavelength (nm)	1300 ± 20/1550 ± 20	1485 ± 15/1570 ± 10			
Output power (dBm) ^f	≥ 8	≥ -3.5			
Minimum spectral density (dBm/nm) ^b	-28 (1260-1360, 1510-1590 nm)	-29 (1460-1625 nm)			
Peak spectral density (dBm/nm) ^b	-10	-23			
Total power stability (dB) ^d					
15 min	± 0.01	± 0.01			
8 hours	± 0.015	± 0.015			
Spectral density stability (dB) ^{b, d, e}					
15 min	± 0.01	± 0.01			
8 hours	± 0.01	± 0.01			
Ripple (dB) ^{e, g}	0.3	0.3			
Fiber type (μm)	9/125	9/125			

GENERAL SPECIFICATIONS	
Size (H x W x D)	117 mm x 222 mm x 333 mm (4 5/8 in x 8 3/4 in x 13 1/8 in)
Weight ^b	2.7 kg (5.9 lb)
Temperature	
operating	0 °C to 40 °C (32 °F to 104 °F)
storage	-40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity	0 % to 80 % non-condensing

SAFETY
IEC 60825-1:A2: 2001
Class 1M LED Product

ORDERING INFORMATION

FLS-2200-XX-P1-XX-XX

Wavelength

- 02 = 1300 nm
- 03 = 1550 nm
- 04 = 1610 nm
- 05 = 1485 nm
- 06 = 980 nm
- 23 = 1300/1550 nm dual-window SLEDs
- SCL = 1460 nm to 1620 nm dual SLED

Connector

- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG (EI only)
- EI-EUI-89 = UPC/FC narrow key
- EI-EUI-90 = UPC/ST (EI only)
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000
- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Isolator

- 00 = Without isolator
- IS = With double stage isolator^a

Example: FLS-2200-03-P1-IS-EA-EUI-89

Note

a. Isolator is not available at 980 nm.

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: +1 418 683-0211 | Fax: +1 418 683-2170 | info@EXFO.com

Toll-free: +1 800 663-3936 (USA and Canada) | www.EXFO.com

EXFO America	3400 Waterview Parkway, Suite 100	Richardson, TX 75080 USA	Tel.: +1 972 761-9271	Fax: +1 972 761-9067
EXFO Asia	100 Beach Road, #22-01/03 Shaw Tower	SINGAPORE 189702	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	36 North, 3 rd Ring Road East, Dongcheng District Room 1207, Tower C, Global Trade Center	Beijing 100013 P. R. CHINA	Tel.: + 86 10 5825 7755	Fax: +86 10 5825 7722
EXFO Europe	Omega Enterprise Park, Electron Way	Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 23 8024 6810	Fax: +44 23 8024 6801
EXFO NetHawk	Elektronikkatie 2	FI-90590 Oulu, FINLAND	Tel.: +358 (0)403 010 300	Fax: +358 (0)8 564 5203
EXFO Service Assurance	270 Billerica Road	Chelmsford, MA 01824 USA	Tel.: +1 978 367-5600	Fax: +1 978 367-5700

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the Web version takes precedence over any printed literature.